


Product Specification



Product Description

- System Input Power: 12W
- Efficacy: 123 lm/W
- Lifetime Rating: 50,000Hrs
- Input Frequency(Hz): 50/60Hz
- Warranty: 5 Years standard

Dimensions

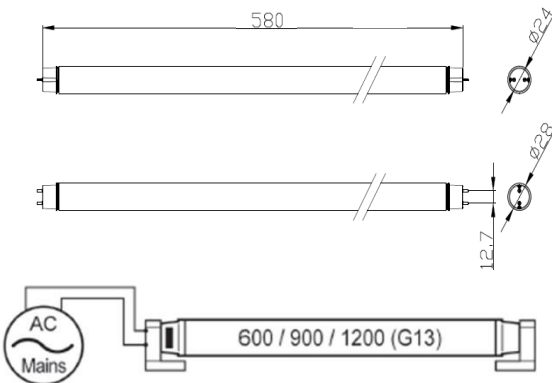



Performance	T806-012OF65IJP
Luminous Flux(lm)	1,480 lm
Power Consumption	12W
Power factor	> 0.9
Efficiency(lm/W)	123 lm/W
CCT(K) Spec	6,500K
CRI(Ra)	>80
Beam Angle	125°
Input Voltage(V)	100 - 277Vac
Operating Temp.	-20°C~50°C

※ Tolerance Range : ± 10%

Physical Info	
Dimension(mm)	Ø28 x 580(mm)
Luminous active(mm)	536.4 x 13.7
Weight	> 190 g

Certification & Qualification

Light Distribution & Distance Luminary

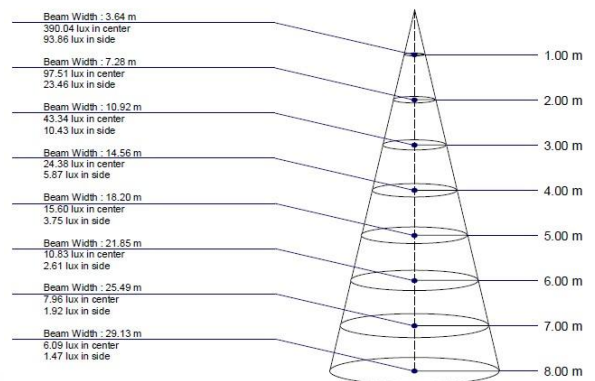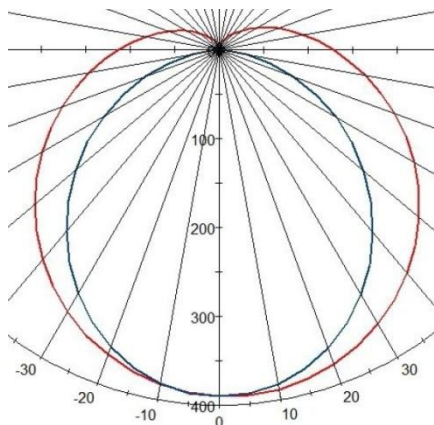

Average Beam Angle = 122.4°
 Max. Beam Angle = 141.6° at $\Phi 1 = 0^\circ \sim \Phi 2 = 180^\circ$
 Min. Beam Angle = 105.4° at $\Phi 1 = 90^\circ \sim \Phi 2 = 270^\circ$