




Product Description

- System Input Power: 22W
- Efficacy: 127 lm/W
- Lifetime Rating: 50,000Hrs
- Input Frequency(Hz): 50/60Hz
- Warranty: 5 Years standard

Dimensions

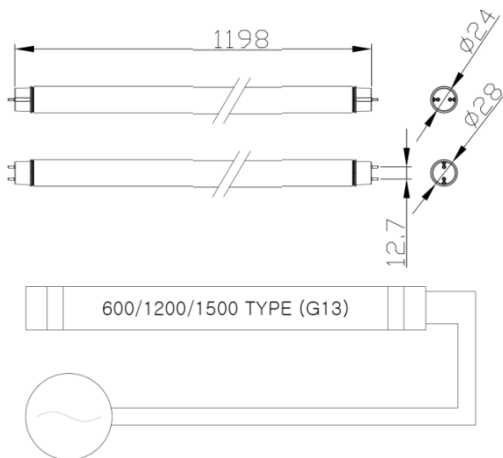

Product Specification

Performance	T812-022OF50IJP
Luminous Flux(lm)	2,800 lm
Power Consumption	22W
Power factor	> 0.9
Efficiency(lm/W)	127 lm/W
CCT(K) Spec	5,000K
CRI(Ra)	>80
Beam Angle	126°
Input Voltage(V)	100 - 277Vac
Operating Temp.	-20°C~50°C


※ Tolerance Range : ± 10%

Physical Info


Dimension(mm)	Ø28 x 1198(mm)
Luminous active(mm)	1154.4 x 13.7
Weight	> 330 g

Certification & Qualification

Light Distribution & Distance Luminary

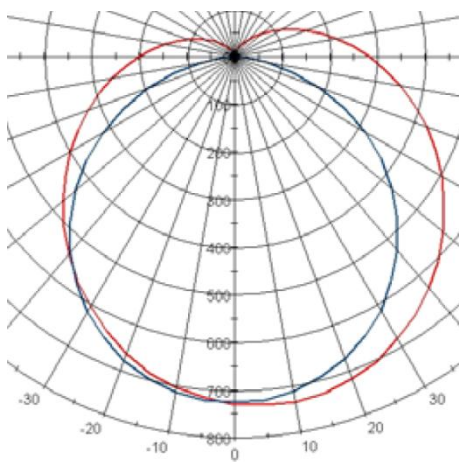

— (0-180)
— (90-270)

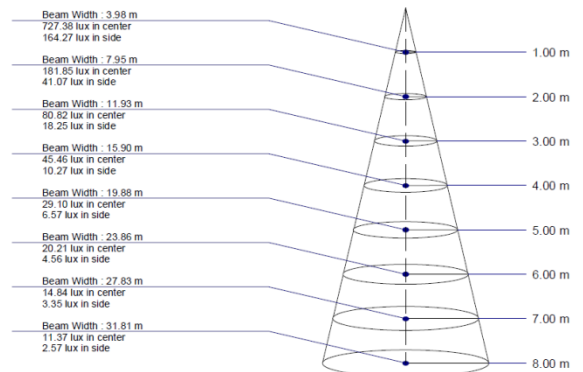

Average Beam Angle = 126.6°
Max. Beam Angle = 142.9° at Ø1 = 0°~ Ø2 = 180°
Min. Beam Angle = 112.4° at Ø1 = 90°~ Ø2 = 270°