

## Product Specification




Performance	T812-022OF65IJP
Luminous Flux(lm)	2,660 lm
Power Consumption	22W
Power factor	> 0.9
Efficiency(lm/W)	121 lm/W
CCT(K) Spec	6,500K
CRI(Ra)	>80
Beam Angle	125°
Input Voltage(V)	100 - 277Vac
Operating Temp.	-20°C~50°C

※ Tolerance Range : ± 10%

## Product Description

- System Input Power: 22W
- Efficacy: 121 lm/W
- Lifetime Rating: 50,000Hrs
- Input Frequency(Hz): 50/60Hz
- Warranty: 5 Years standard



## Dimensions

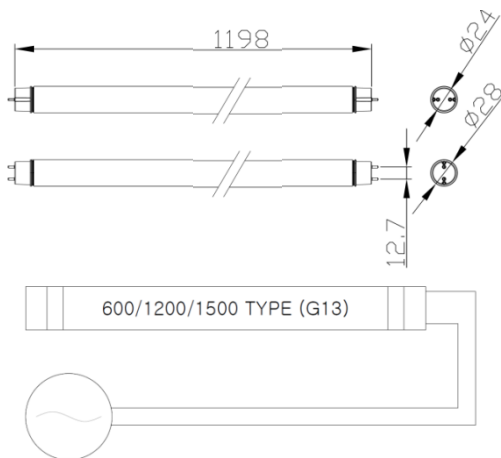

Physical Info	
Dimension(mm)	Ø28 x 1198(mm)
Luminous active(mm)	1154.4 x 13.7
Weight	> 330 g

## Certification & Qualification

## Light Distribution & Distance Luminary

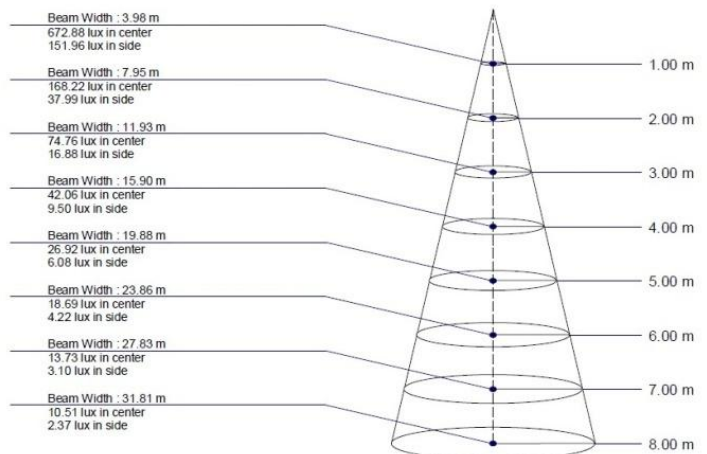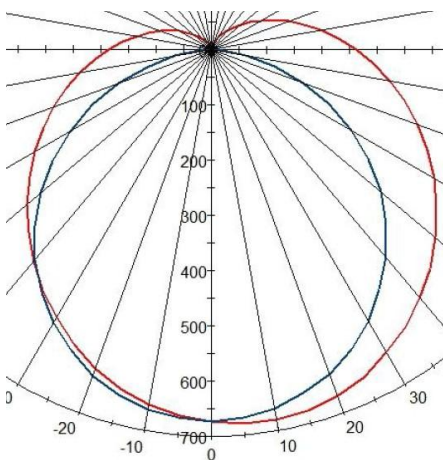

Average Beam Angle = 126.6°  
 Max. Beam Angle = 143.1° at Φ1 = 0°~ Φ2 = 180°  
 Min. Beam Angle = 112.3° at Φ1 = 90°~ Φ2 = 270°